

## Xline CE Version



### Features

- High lighting efficiency, up to 100lm/W
- Powerful light output, up to 1500 lm/Meter
- Built-In Driver
- UGR<19, ideal light distribution for Office Lighting
- Super fast installation, suspended or surface mounted
- Connectable. Fast installation, suspended or surface mounted
- Modern, stylish, excellent surface treatment
- Durable with life span over 50,000 hours
- 5 Years Guarantee

### Applications

A perfect luminaire for open space area in various applications such as:

- Offices
- Warehouses
- Workshops
- Shops
- Schools
- Supermarkets
- Meeting Rooms



REV 1.2

23/05/2018

## Sheenly LED Linear Light

Sheenly's new LED Linear Light Xline is a unique and innovative product, which is the first edge lit linear panel with built-in driver. A hybrid of edge lit technology, with its extremely high efficiency and well controlled UGR, Xline is suitable to be used as a linear high-bay for work place and offices.

### Specifications

#### Dimension (inches[mm])

26W & 40W	45.3"x2.2"x2.6"[1150*55*65]
30W & 50W	57.1"x2.2"x2.6"[1450*55*65]

#### Power & Lumen Output

26W	2600 lm @ 4000K
30W	3000 lm @ 4000K
40W	4000 lm @ 4000K
50W	5000 lm @ 4000K

#### Color Temperature

Warm White	3000 ±200K
Natural White	4000 ±250K
Pure White	5700 ±350K

**Color Rendering Index** >80

**Rated Life (L70)** 50,000 Hours

**Housing** Aluminum

**Beam Spread** 90°

**Operating Temperature** -20°C to +60°C (Amb.)

**Input Voltage** 100-277V/AC

**Power Factor** >0.95

**Net Weight** 2.0 Kg


**Glow Wire** 650 °C (850°C Optional)

**IP** IP40


**IK** IK05

**Installation** Suspension  
surface mounted

## Dimension and Illumination Diagram

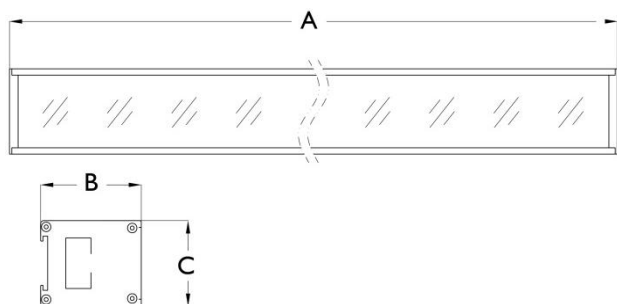

	Dimension A (inches [mm])	Dimension B (inches [mm])	Dimension C (inches [mm])
<b>26W &amp; 40W</b>	45.3[1150]	2.6[65]	2.2[55]
<b>30W &amp; 50W</b>	57.1[1450]	2.6[65]	2.2[55]

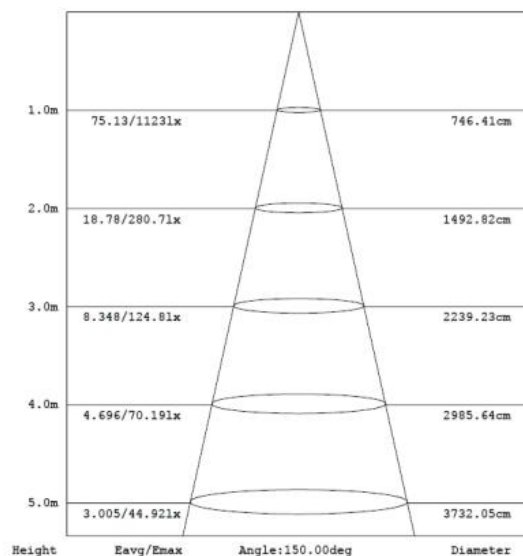

## Ordering Information

Sheenly	Class	Watt	CCT	Finishing	Model
<b>SL</b> =Sheenly Lighting	<b>XLN</b> =Xline	<b>26W</b> <b>30W</b> <b>40W</b> <b>50W</b>	<b>WW</b> =3000 ±200K <b>NW</b> =4000 ±250K <b>PW</b> =5700 ±350K	<b>SI</b> =Silver	<b>N2</b>

Part Number	Power	CCT	Lumen Output	Beam	Dimension (inches[mm])
SL- XLN -26W- WW- N2	26W	3000K ±200K	2300	90°	45.3"x2.2"x2.6"[1150*55*65]
SL- XLN -26W- NW- N2		4000K ±250K	2600	90°	
SL- XLN -26W- PW- N2		5700K ±350K	2600	90°	
SL- XLN -40W- WW- N2	40W	3000K ±200K	3800	90°	
SL- XLN -40W- NW- N2		4000K ±250K	4000	90°	
SL- XLN -40W- PW- N2		5700K ±350K	4000	90°	
SL- XLN -30W- WW- N2	30W	3000K ±200K	2800	90°	57.1"x2.2"x2.6"[1450*55*65]
SL- XLN -30W- NW- N2		4000K ±250K	3000	90°	
SL- XLN -30W- PW- N2		5700K ±350K	3000	90°	
SL- XLN -50W- WW- N2	50W	3000K ±200K	4800	90°	
SL- XLN -50W- NW- N2		4000K ±250K	5000	90°	
SL- XLN -50W- PW- N2		5700K ±350K	5000	90°	

## Accessory



Suspension Kit:  
Steel Cables, Screws, accessories, etc.



## Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-XLN-26W-XW-N2	1	L1225*W210*H210	4	1440	2880
SL-XLN-40W-XW-N2	1	L1225*W210*H210	4	1440	2880
SL-XLN-30W-XW-N2	1	L1525*W210*H210	4	864	2016
SL-XLN-50W-XW-N2	1	L1525*W210*H210	4	864	2016

### Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2018 Sheenly Lighting all rights reserved.

Available Type:  Xline

Patten

