

Lily



Features

- Ultra modern, stylish and Innovative design
- Excellent light distribution, a blend of space + accent lighting. Innovative hybrid of edge lit and back lit lighting technology
- Color variable, different color for spatial and accent lighting
- Energy efficient, >100lm/W
- Anti-Glare UGR19
- No UV or IR emissions
- Durable with life span over 35,000 hours
- Environmentally friendly – fully recyclable, no mercury or other hazardous materials
- Simple and convenient installation

Applications

A perfect luminaire for open space area in various applications such as:

- Restaurants
- Offices
- Residentials
- Theatres
- Shopping malls



Sheenly LED Space Lighting

Sheenly's new designed LED Light Lily is a revolutionary product, which developed for space lighting + Accent Lighting, A fixture combines space and accent lighting. This product has a built-in driver, and stylish appearance with innovative design.


A hybrid of edge lit and backlit technology gives an excellent blend of space and accent lighting, making it the first of its kind in the lighting industry. Lily is a perfect luminaire for open space area in various applications.

Specifications

Dimension	D380*90 mm
Power & Lumen Output	
26W	2600 lm @ 4000K
36W	3600 lm @ 4000K
Color Temperature	
Warm White	3000K ±200K
Natural White	4000K ±250K
Daylight White	5000K ±300K
Pure White	5700K ±350K
Color Rendering Index	>80
Rated Life (L70)	50,000 Hours
Housing	Aluminum
Optics	Opal/Micro Prismatic
Beam Spread	Up/Down
Operating Temperature	-20°C to +60°C (Amb.)
Input Voltage	200-240V/AC
Power Factor	>0.95
Working Voltage	
26W	26±2 V/DC
36W	46±3 V/DC
Working Current	700 mA
Net Weight	2.5 Kg
Glow Wire	650 °C (850°C Optional)
IP	IP20
IK	IK05
Installation	Pendant Mounted

10/31/2017

Dimension and Illumination Diagram

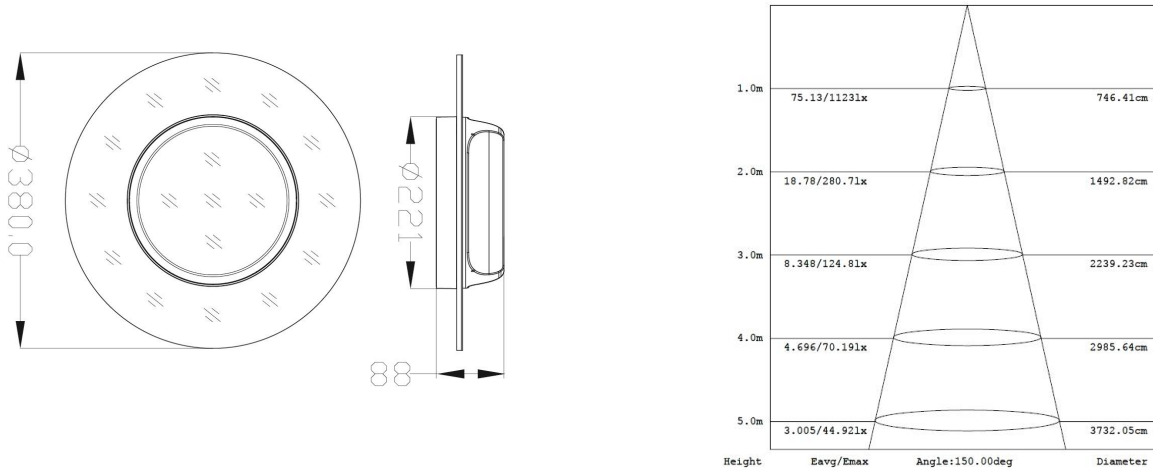

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel	26W 36W	WW=3000 ±200K NW=4000 ±250K DW=5000 ±300K PW=6000 ±350K	LY	SI=Silver	

Part Number	Power	CCT	Lumen Output	Beam	Dimension
SL-PAN-26W-WW-LY	26W	WW=3000 ±200K NW=4000 ±250K DW=5000 ±300K PW=6000 ±350K	2600	Up/Down	D380*90 mm
SL-PAN-26W-NW-LY	26W		2600	Up/Down	D380*90 mm
SL-PAN-26W-DW-LY	26W		2600	Up/Down	D380*90 mm
SL-PAN-26W-PW-LY	26W		2600	Up/Down	D380*90 mm
SL-PAN-36W-WW-LY	36W		3600	Up/Down	D380*90 mm
SL-PAN-36W-NW-LY	36W		3600	Up/Down	D380*90 mm
SL-PAN-36W-DW-LY	36W		3600	Up/Down	D380*90 mm
SL-PAN-36W-PW-LY	36W		3600	Up/Down	D380*90 mm

Accessory



Suspension Kit:
Steel Cables, Screws, etc.



Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-PAN-26W-XW-LY	1	L425*W420*H425	4	768	1536
SL-PAN-36W-XW-LY	1	L425*W420*H425	4	768	1536

Shanghai Sheenly Lighting Co., Ltd.

No. 2755 SanLu Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.

Lily Space Lighting Installation Manual

