




Openspace LED Light Bar

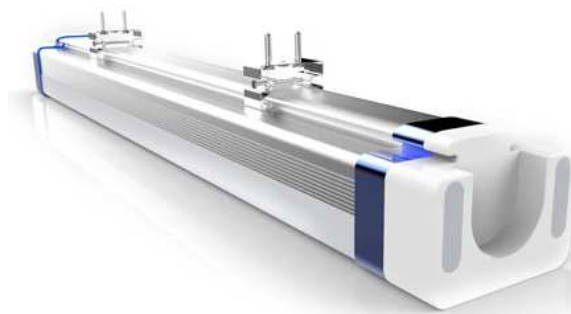

Ideal for Industrial Buildings.

IP66

IK08

Water, Dust and Corrosion Proof

L70 Rated to 50,000 hours.

Food Safe Versions Available

The Di-Astrum Openspace LED Light Bar is designed for to replace existing linear fixtures in a wide variety of applications. Ideal for a wide variety of industrial applications, interior or exterior requirements including underground car parks, and areas where the risk of impact is likely. This universal fitting comes with a 5 Year Warranty. Constructed of Fully Extruded Aluminium housing and Toughened Polycarbonate Diffuser ensure an astoundingly Robust Waterproof, Dust Proof, and Anti-Corrosive fixture. This product is also UV and Mercury Free and is also available as a Food Safe Version

Electrical Information

Nominal Wattage	20 or 65W
Operating Temp	-20 °C to + 35 °C
Power Factor	> 0.93
THD	< 20%
Input Voltage	110-240 VAC
CRI	> 80
CCT	5000K

Mechanical Information

Sizes	600 – 1500mm
Weight	1.8 - 5 KG
Mounting	Direct / Suspended
IP Rating	IP66
IK Rating	IK08
Housing	Extruded Aluminium
Diffuser	Toughened Polycarbonate

Ordering Information

Part Number	Wattage	Lumens	Dimensions
DOLB-60-20-50K-F	20W	1900	600 x 63 x 83
DOLB-60-20-50K-F-DIM	20W	1900	600 x 63 x 83
DOLB-60-20-50K-F-MIC	20W	1900	600 x 63 x 83
DOLB-60-20-50K-F-DIM-MIC	20W	1900	600 x 63 x 83

Features

- Ideal for Industrial Applications
- IP66
- IK08
- L70 to 50,000 Hrs
- 5 Year Warranty
- Water Proof
- Dust Proof
- Corrosion Proof
- Food Safe Available

Benefits

- Up To 66% Energy Savings
- Zero Maintenance
- Improved Light Quality

Typical Applications

- Underground Car Parks
- Train Stations
- Bus Stations
- Tunnels
- Factories
- Warehouses
- Garages
- Walkways
- Mezzanine Decks
- Distribution Centres
- Logistics Depots,
- Under Canopies
- Food Factories
- Manufacturing Plants
- Loading Bays
- Hospitals



Ordering Information Continued

Part Number	Wattage	Lumens	Dimensions
DOLB-12-40-50K-F	40W	3800	1200 x 63 x 83
DOLB-12-40-50K-F-DIM	40W	3800	1200 x 63 x 83
DOLB-12-40-50K-F-MIC	40W	3800	1200 x 63 x 83
DOLB-12-40-50K-F-DIM-MIC	40W	3800	1200 x 63 x 83
DOLB-15-50-50K-F	50W	4750	1500 x 63 x 83
DOLB-15-50-50K-F-DIM	50W	4750	1500 x 63 x 83
DOLB-15-50-50K-F-MIC	50W	4750	1500 x 63 x 83
DOLB-15-50-50K-F-DIM-MIC	50W	4750	1500 x 63 x 83
DOLB-15-65-50K-F	65W	6175	1500 x 63 x 83
DOLB-15-65-50K-F-DIM	65W	6175	1500 x 63 x 83
DOLB-15-65-50K-F-MIC	65W	6175	1500 x 63 x 83
DOLB-15-65-50K-F-DIM-MIC	65W	6175	1500 x 63 x 83

Please note that alternative Kelvin Colour Temperatures or Requirements can be manufactured as Specials, however Additional Lead Times Will Apply.

Food Safe Versions Also Available Upon Request

Features

Ideal for Industrial Applications
IP66
IK08
L70 to 50,000 Hrs
5 Year Warranty
Water Proof
Dust Proof
Corrosion Proof
Food Safe Available

Benefits

Up To 66% Energy Savings
Zero Maintenance
Improved Light Quality

Typical Applications

Underground Car Parks
Train Stations
Bus Stations
Tunnels
Factories
Warehouses
Garages
Walkways
Mezzanine Decks
Distribution Centres
Logistics Depots
Under Canopies
Food Factories
Manufacturing Plants
Loading Bays
Hospitals