


LED Ceiling Light

SQ4/SQ6/SQ8/SQ30

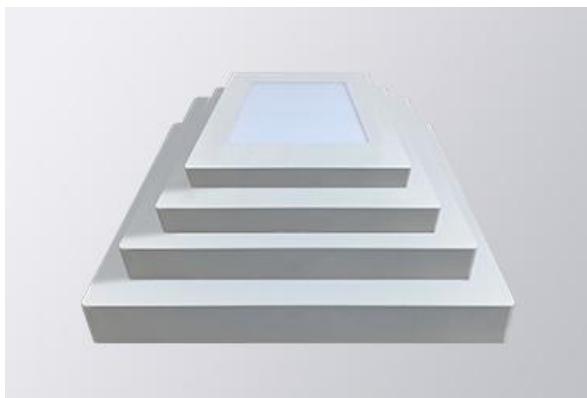

Features

- The highest PFC driver can be up to 0.99
- CRI>80, Erp compatible
- Ultra slim design
- Dimmable compatible with Dali
- Lighting sensors and Motion sensors are optional
- 5 years guarantee

Applications

Meets the general and decoration lighting environment such as:

- Offices
- Restaurants
- Hotels
- Shops
- School and Hospital
- Workshop
- Meeting Rooms



REV 1.0

Sheenly LED Flat Downlight

Sheenly LED Flat Downlight adopt super bright LED as its luminous body, powered by low voltage constant current driver.

Excellent thermal management can effectively guarantee the LED'S long-term stability. The front panel board is high translucent acrylic, which ensures the light even, soft and high transmittance. Instant start, no flickering, no humming, no hazardous material.

Specifications

Dimension (mm)

SQ4	120*120*35
SQ6	150*150*35
SQ8	225*225*35
SQ30	300*300*38

Color Temperature

Warm White	3000K±200K
Natural White	4000K±250K
Pure White	5700K±350K

Power & Lumen Output

SQ4"	08W	600 lm @ 4000K
SQ6"	15W	1200 lm @ 4000K
SQ8"	22W	1800 lm @ 4000K
SQ30"	25W	2200 lm @ 4000K

Color Rendering Index

>80

Rated Life (L70)

50,000 Hours

Housing

Aluminum

Beam Spread

120°

Operating Temperature

-20°C to +45°C (Amb.)

Input Voltage

200-240V/AC

Power Factor

>0.95

Net Weight

0.28±0.1Kg -0.52±0.1Kg


IP/ IK

IP20/ IK05

Installation

Surface Mounted

Dimension and Illumination Diagram

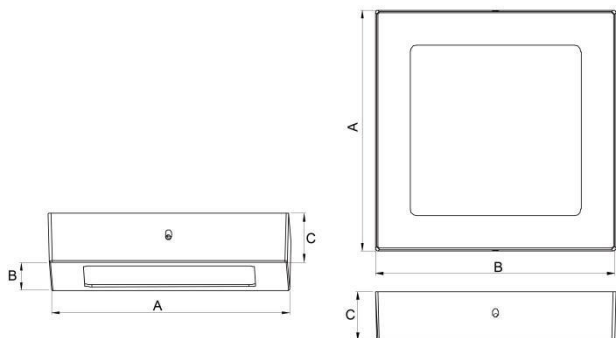

		Dimension A [mm]	Dimension B [mm]	Dimension C [mm]
SQ4	08W	120	120	35
SQ6	15W	150	150	35
SQ8	22W	225	225	35
SQ30	25W	300	300	38

Ordering Information

Sheenly	Class	Watt	CCT	Model	Finishing	Options
SL=Sheenly Lighting	PAN=Panel Light	8W	WW=3000K	SQ4	White	/
		15W	NW=4000K	SQ6		
		22W	PW=5700K	SQ8		
		25W		SQ30		

*Standard finishing comes in White, for other finishing color please specify when place the order.

Part Number	Power	CCT	Lumen Output	Beam	Dimension [mm]
SL-PAN-08W-XW-SQ4	08W	3000K/4000K/5700K	450-650	120°	120*120*35
SL-PAN-15W-XW-SQ6	15W	3000K/4000K/5700K	1000-1300	120°	150*150*35
SL-PAN-22W-XW-SQ8	22W	3000K/4000K/5700K	1800-2200	120°	225*225*35
SL-PAN-25W-XW-SQ30	25W	3000K/4000K/5700K	1800-2200	120°	300*300*38

Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-PAN-08W-XW-SQ4	1	L280*W235*H280	20	21280	42560
SL-PAN-15W-XW-SQ6	1	L380*W235*H380	20	10400	20800
SL-PAN-22W-XW-SQ8	1	L490*W235*H490	20	6400	12800
SL-PAN-25W-XW-SQ30	1	L640*W500*H330	20	3840	7680

Shanghai Sheenly Lighting Co., Ltd.

No. 1688 Lianhang Road, Bldg 22, Minhang District, Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

*All specifications subject to change without notice.

©2009-2018 Sheenly Lighting all rights reserved.