

## Pendo



### Features

- up to 110lm/W()
- Up & down light design
- Simple installation and maintenance
- Easy and seamless linkable, straight connection.
- Modern, stylish, excellent surface treatment
- Durable with life span over 50,000 hours
- 5 Years Guarantee
- 

### Applications

A perfect luminaire for open space area in various applications such as:

- Offices
- Workshops
- Shops
- Schools
- Supermarkets
- Meeting Rooms



### LED Pendant Linkable Linear Light

Sheenly's new Up down pendant Linear Light brings out the beauty of any space with a unifying aesthetic.

The Up/down Linear Light Pendo offer soft light and reasonable lighting configuration design, its direct and indirect light with no dark areas.

The Pendo's each side can have different color temperature (3000-6000K) to get the best health light environment.

### Specifications

#### Dimension ([mm])

40W	1150*75*84
50W	1450*75*84

#### Power & Lumen Output

40W	3300 lm @ 4000K
50W	5200 lm @ 4000K

#### Color Temperature

Warm White	3000 ± 200K
Natural White	4000 ± 250K
Pure White	5700 ± 350K

#### Color Rendering Index

>80

#### Rated Life (L70)

50,000 Hours

#### Housing

Aluminum

#### Beam Spread

10%Up/90%Down

#### Operating Temperature

-20°C to +40°C (Amb.)

#### Input Voltage

220-240V/AC

#### Power Factor

>0.9

#### Working Voltage & Current

40W	Up: 40V±2V/DC 200mA
	Down: 37V±2V/DC 700mA
50W	Up: 40V±2V/DC 200mA
	Down: 40V±2V/DC 1050mA

#### Glow Wire

650 °C

#### IP

IP40


#### IK

IK05

#### Installation

Pendent Mounted

## Dimension

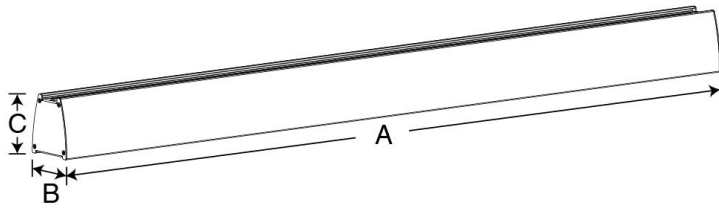

	Dimension A [mm]	Dimension B [mm]	Dimension C [mm]
<b>40W</b>	1150	75	84
<b>50W</b>	1450	75	84

## Ordering Information

Sheenly	Class	Watt	CCT	Model	Options
SL=Sheenly Lighting	LIN=Linear Light	<b>40W</b> <b>50W</b>	<b>WW</b> =3000 ±200K <b>NW</b> =4000 ±250K <b>DW</b> =5000 ±300K	<b>P4</b> <b>P5</b>	<b>UD</b>

Part Number	Power	CCT	Lumen Output	Beam	Dimension (mm)
SL-LIN-40W-WW-P4-UD	40W	3000K ±200K	3200	10%Up/90%Down	1150*75*84
SL-LIN-40W-NW-P4-UD		4000K ±250K	3300	10%Up/90%Down	
SL-LIN-40W-PW-P4-UD		5000K ±300K	3300	10%Up/90%Down	
SL-LIN-50W-WW-P5-UD	50W	3000K ±200K	5000	10%Up/90%Down	1450*75*84
SL-LIN-50W-NW-P5-UD		4000K ±250K	5200	10%Up/90%Down	
SL-LIN-50W-PW-P5-UD		5000K ±300K	5200	10%Up/90%Down	

## Application



## Packing Information

Part Number	Pcs./Inner box	Master Carton Size[mm]	Pcs./Master Carton	Pcs./20' Container	Pcs./40' Container
SL-LIN-40W-XW-P4-UD	1	L1215*W245*H265	4	896	1792
SL-LIN-50W-XW-P5-UD	1	L1515*W245*H265	4	672	1568

### Shanghai Sheenly Lighting Co., Ltd.

Bldg 22, No. 1688 Lianhang Road, Minhang District Shanghai 201112, China

Tel: (+86)-21-6411 3138 Fax: (+86)-21-6411 3862

\*All specifications subject to change without notice.

©2009-2017 Sheenly Lighting all rights reserved.